


DIMENSION

All Dimensions are Approximate. Dimensions May Vary with Bucket. Refer to Operating Specifications.

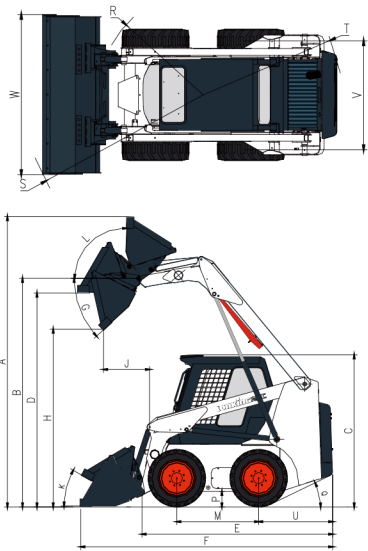

NO.	DESCRIPTION	UNIT	DATA
A	Max.Operation Height	mm	3750
B	Bucket Pin Height	mm	2920
C	Cab Roof Height	mm	2000
D	Max.Height At Bucket Leveled	mm	2730
E	Length Without Attachment	mm	2420
F	Length With Standard Bucket	mm	3220
H	Dumping Height	mm	2260
J	Reach Rollback	mm	640
M	Wheelbase	mm	1050
P	Ground Clearance	mm	210
R	Front Turning Radius Without Attachment	mm	1200
S	Front Turning Radius	mm	2010
T	Rear Turning Radius	mm	1520
U	Tail Length	mm	960
V	Center Distance between Two Wheels	mm	1240
W	Bucket Width	mm	1835
G	Dumping Angle At Max.Height	°	40
K	Bucket Angle On Ground	°	28
L	Bucket Rollback Angle At Max.Height	°	94
Q	Start Angle	°	27

TECHNICAL PARAMETERS

BASIC	Operating Weight	2900kg
	Rated Payload	861kg
	Bucket Capacity	0.48m³
	Tipping Load	1722kg
	Breakout Force	22KN
	Traction Force	18.9KN
ENGINE	L×V×H (mm)	3230*1820*2020
	Engine Model	4TNV86CT
	Rated Power	35.5KW
	Displacement	2.09L
	Fuel consumption	255g/kw·h
	Stroke	90mm
HYDRAULIC SYSTEM	Bore	86mm
	Emission Standard	EPA Tier 4F &EuroV
	Hydraulic Flow – Standard	74L/min·2400rpm
DRIVE TRAIN	Type	Pilot
	Hydraulic Pressure– Standard	21MPa
ELECTRIC	Travel Speed -F&R	11.5km/h
	Tyre	10-16.5NHS
SERVICE REFILL CAPACITY	Voltage(V)	12 V
	Capacity(Ah)	165 Ah
	Chain Box, Each Side	9L
	Cooling System	12L
	Engine Crankcase	8L
	Fuel Tank	83L
	Hydraulic Tank	65L

OPTIONAL

Cold Start	Tree Planter
Open Cab	Four In One Bucket
Solid Tyre	Detachable Bucket Tooth
Centralized pressure measurement	Detachable Bucket Blade
Rearview mirror heating function	Spiral Drill
Warm Air Blower	Closed Sweeper
Excavator	Snow Blade
Bevel Sweeper	Fork

Function Description :

- 1.Integrated loader frame, higher intensity and better stability.
- 2.Yanmar strong power engine,which meets EU Stage V emission standard.
3. Original and imported hydraulic system with stable reliability.
- 4.Cab adopts big angle and backward dump design, backward dump leaves bigger space for repair and convenient for maintenance.
5. High-strength cab in line with FOPS/ROPS international safety standards, with larger driving space and more comfortable;
- 6.Hydraulic operation system adopts design of electric control self-lock and interlock to reduce misoperation to make driving safer.
7. The use of international quick change device, can quickly and conveniently replace a variety of attachments;Hydraulic quick connector can be matched with most manufacturers' fittings;
- 8.Compared with similar types, it has characteristics of narrow loader body, long wheelbase, high chassis, smaller steering radius, higher stability and stronger passing capacity.

For more information on Lonking products, Please contact our local agent:

The following blank can be used for notes or comments.

Lonking, Lonking CDM Series and their respective logos, as well as corporate identity in this leaflet are trademarks of Lonking Holdings Ltd., and may not be used without written permission.
2024/02

Specifications and design are subject to change without prior notice.
Machines shown may not include optional accessories.



CDM308
SKID STEER LOADER
Efficiency Rules the Future



- ENGINE MODEL : 4TNV86CT
- RATED POWER: 35.5KW/2400rpm
- OPERATING WEIGHT: 2900kg
- RATED PAYLOAD: 861kg
- BUCKET CAPACITY: 0.48m³

Tel: +48 575 234 090
Email: sprzedaz@lonking-eu.com