


Lonking 龙工

CDM6016

HYDRAULIC EXCAVATOR

Efficiency Rules the Future

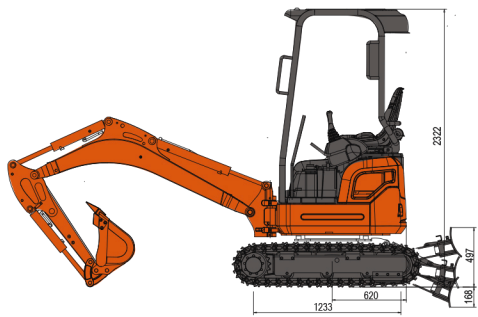

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	1700 kg
	Boom length	1830 mm
	Arm length	950 mm
	Standard bucket	0.04 m³
	Max.Travel speed	2.0/3.6 km/h
	Max.Swing speed	8.5 rpm
	Grade ability	35° (70%)
	Ground pressure	25 kPa
	Max.Traction force	15.6 kN
Engine	Engine model	D782
	Rated power	9.8 kW/2300 rpm
	Max.Torque	44.5/1800 N.m/rpm
	Displacement	0.778 L
	Fuel tank	13 L
Hydraulic	Max.Flow(total)	7.2×2+4.5 L/min
	Max.Working pressure	21.6 MPa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	8.8 kN(ISO)
	Max.Bucket digging force	15.2 kN(ISO)
	Hrdraulic oil tank	18 L
Chassis	Track width	230 mm
	Track shoes number	37(each side)
	Carrier rollers number	0(each side)
	Track rollers number	3(each side)
Electric	System vollage	12 V
	Battery capacity	12 V,45 Ah

PRODUCT FEATURES

- Kubota green engine.Meet EU stage V emission standards.
- Multi-pump hydraulic system with confluence channel and boom priority valve.
- Adopts tailless design. Boom is movable.
- Equipped with breaking hammer pipeline and reserve spare valve.
- Detachable split type canopy for different working conditions.
- Retractable chassis, good trafficability and more stable.

OPTIONAL

- 600mm width cleaning bucket
- 1000mm width cleaning bucket
- Rubber track

The following blank can be used for notes or comments.

For more information on Lonking products,
Please contact our local agent:

Specifications and design are subject to change without prior notice.
Machines shown may not include optional accessories.

Tel: +48 575 234 090
Email: sprzedaz@lonking-eu.com

- OPERATING WEIGHT: 1700kg
- ENGINE POWER: 9.8kW
- BUCKET CAPACITY: 0.04m³
- TRAVEL SPEED: 2.0/3.6km/h