


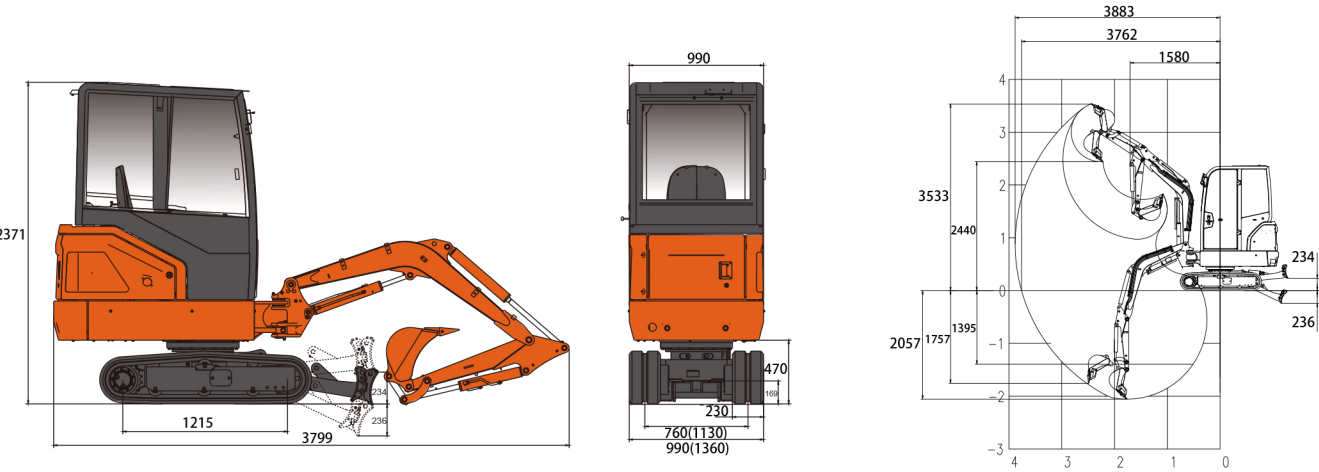

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	1850 kg
	Standard bucket Capacity	0.04 m³
	Standard bucket Width	380 mm
	Max.Travel speed	2.5/4.5km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	30 kPa
	Max.Traction force	16.7 KN
	Boom swing angle (L/R)	65°/47°
Engine	Engine brand	YANMAR
	Engine model	3TNV80F-SSLKC
	Rated power	13.4 kW/2200 rpm
	Displacement	1.267 L
	Fuel tank	21 L
Hydraulic	Max.Flow(total)	62 L/min
	Max.Working pressure	21 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	12 kN
	Max.Bucket digging force	21 kN
	Hrdraulic oil tank	26 L
Chassis	Track width	230 mm
	Track type	Rubber crawler
	Carrier rollers number	1(each side)
	Track rollers number	3(each side)
Electric	System vollage	12 V
	Battery capacity	12 V,45 Ah

STANDARD EQUIPMENT

Fops/Tops cabin
Suspension seat
Warm air blower
Hydraulic pilot control rod
Deflectable boom
Warning light
Breaker pipeline

OPTIONAL EQUIPMENT

Front safeguard
Fops/Tops canopy
260mm width bucket
600/1000mm width bucket
Quick hitch pipeline
230mm steel tracks

PRODUCT FEATURES

Yanmar strong power engine,which meet U.S. EPA Tier 4 Final, EU Stage V emission standards.
Hydraulic control elescopic chassis designed for narrow and complicated working conditions.
Wider space and view are provided by enlarged front windscreen and sunroof.
Clear monitoring instrument that is easy to operate and check.
The tail hood can be opened to a large degree which makes easier daily inspection and change of filters.
Retractable chassis , good trafficability and more stable.

Lonking 龙工

CDM6020
HYDRAULIC EXCAVATOR

Efficiency Rules the Future



The following blank can be used for notes or comments.

For more information on Lonking products,
Please contact our local agent:

Tel: +48 575 234 090
Email: sprzedaz@lonking-eu.com

- OPERATING WEIGHT: 1850kg
- ENGINE POWER: 13.4kW
- BUCKET CAPACITY: 0.04m³
- TRAVEL SPEED: 2.5/4.5km/h