
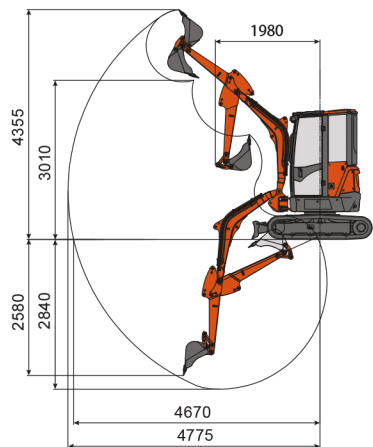



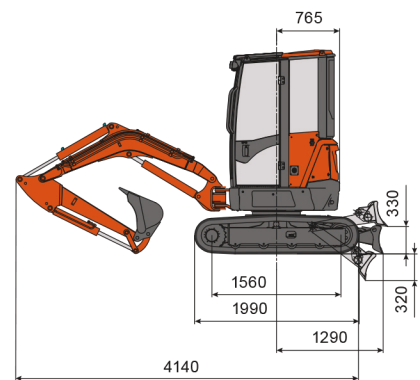

TECHNICAL PARAMETERS

Name		Data
Basic	Operating weight	2650 kg
	Standard bucket Capacity	0.08 m³
	Standard bucket Width	580 mm
	Max.Travel speed	2.6/4.4km/h
	Max.Swing speed	10 rpm
	Grade ability	30°
	Ground pressure	25.1 kPa
	Max.Traction force	30.7 KN
	Boom swing angle (L/R)	65°/50°
Engine	Engine brand	YANMAR
	Engine model	3TNV80-PSU
	Rated power	14.6 kW/2400 rpm
	Displacement	1.267 L
	Fuel tank	26 L
Hydraulic	Max.Flow(total)	2×28.8+19.2+6.5 L/min
	Max.Working pressure	23.5 MPa
	Max.Pilot pressure	3.2 Mpa
	Max.Arm digging force	14(15.8) kN
	Max.Bucket digging force	24 kN
	Hrdraulic oil tank	41 L
Chassis	Track width	300 mm
	Track type	Steel crawler
	Carrier rollers number	1(each side)
	Track rollers number	4(each side)
Electric	System vollage	12 V
	Battery capacity	12 V,45 Ah

STANDARD EQUIPMENT

Fops/Tops cabin
Suspension seat
Warm air blower
Hydraulic pilot control rod
Deflectable boom
Warning light
Breaker pipeline

OPTIONAL EQUIPMENT

Electro-hydraulic proportional joystick
Front safeguard
Fops/Tops canopy
300mm width bucket
1000mm width bucket
Quick hitch pipeline
300mm rubber tracks

PRODUCT FEATURES

Yanmar Strong Power Engine.Emission level reaches EU Stage V .
The combination of zero-tail swing and boom deviation is designed for narrow and complicated working scenarions.
Wider space and view are provide by enlarged front windscreen and sunroof.
Color monitoring digital and analogue combined display
The door and hood can be opened completely to ensure easy and convenient maintenance.
Retractable chassis , good trafficability and more stable.

Lonking 龙工

CDM6025 HYDRAULIC EXCAVATOR

Efficiency Rules the Future



The following blank can be used for notes or comments.

For more information on Lonking products,
Please contact our local agent:

Tel: +48 575 234 090
Email: sprzedaz@lonking-eu.com

OPERATING WEIGHT:	2650kg
ENGINE POWER:	14.6kW
BUCKET CAPACITY:	0.08m³
TRAVEL SPEED:	2.6/4.4km/h