
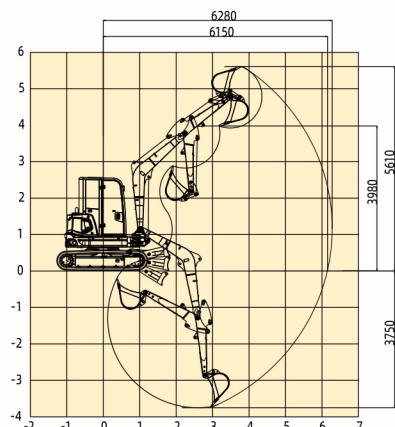


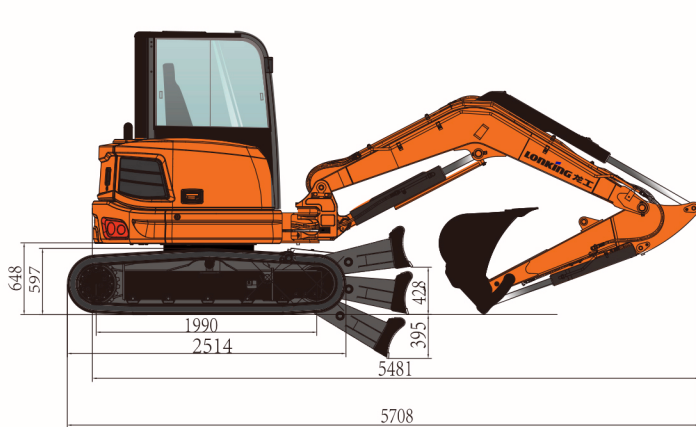

LONKING 龙工
Efficiency Rules the Future

CDM6060
HYDRAULIC EXCAVATOR

TECHNICAL PARAMETERS

Name		Date
Basic	Operating weight	5700 kg
	Boom length	2900 mm
	Arm length	1600 mm
	Standard bucket	0.18 m³
	Max.Travel speed	2.5/4.5 km/h
	Max.Swing speed	9 rpm
	Grade ability	35°(70%)
	Ground pressure	33.87 kPa
	Max.Traction force	49 kN
Engine	Engine model	V2607-CR-E5B
	Rated power	35/2200 KW/rpm
	Max.Torque	174.1/1500 N.m/rpm
	Displacement	2.615L
	Fuel tank	60 L
Hydraulic	Max.Flow(total)	144 L/min
	Max.Working pressure	26 MPa
	Max.Arm digging force	34.1 kN(ISO)
	Max.Bucket digging force	46.8 kN(ISO)
Chassis	Hydraulic oil tank	70 L
	Track width	400 mm
	Track type	Rubber tracks
	Carrier rollers number	1(each side)
Electric	Track rollers number	5(each side)
	System vottage	12 V
	Battery capacity	12 V,100 Ah

PRODUCT FEATURES

Kubota strong power engine. Emission standard meets EPA tier 4F and EU stage V.
High Efficiency Dual Air Filters.
Parallel Radiator Cooling System.
Hydraulic system uses a load sensitive system.
Large LCD Monitor and Advanced Electronic Monitoring System.
No Frame Cab Glasses to Enlarge the Visual Field.
Swinging boom for more flexibility

OPTIONAL

breaking hammer & pipeline
Two way triple pipe
Quick coupler pipeline
Work warning light
Walking alarm
Top protecting net
Front protecting net
Track rubber block
Steel track



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;

- OPERATING WEIGHT: 5700kg
- ENGINE POWER: 35kW
- BUCKET CAPACITY: 0.18m³
- TRAVEL SPEED: 2.5/4.5km/h