


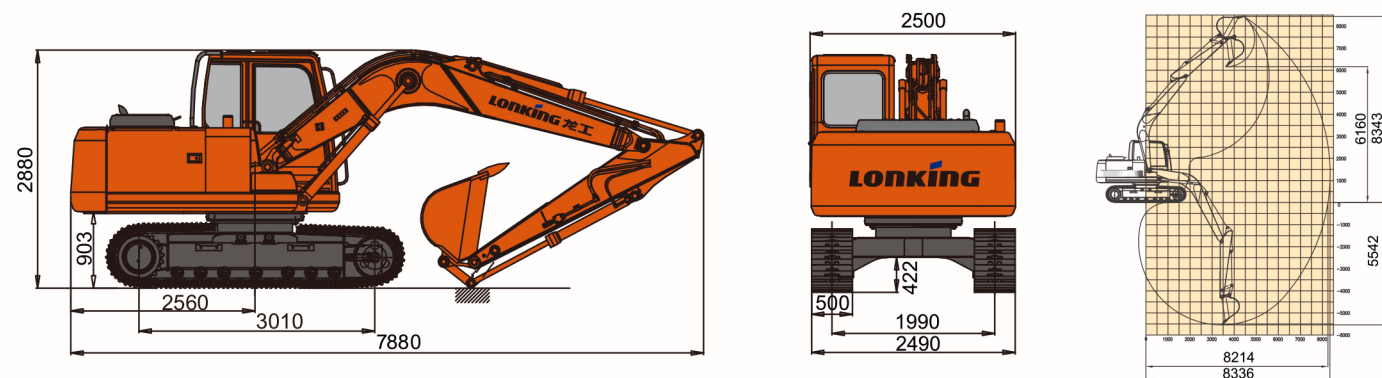

CDM6150F HYDRAULIC EXCAVATOR

TECHNICAL PARAMETERS

Name		Date
Basic	Operating weight	14000 kg
	Boom length	4600 mm
	Arm length	2500 mm
	Standard bucket	0.65 m³
	Max.Travel speed	3.6/5.7 km/h
	Max.Swing speed	11.2 rpm
	Grade ability	35°(70%)
	Ground pressure	42.7 kPa
	Max.Traction force	113 kN
Engine	Engine model	F3.8
	Rated power	90 kW/2200 rpm
	Max.Torque	420/1500 N.m/rpm
	Displacement	3.8 L
	Fuel tank	290 L
Hydraulic	Max.Flow(total)	133×2 L/min
	Max.Working pressure	34.3 MPa
	Max.Pilot pressure	3.9 Mpa
	Max.Arm digging force	92 kN(ISO)
	Max.Bucket digging force	96 kN(ISO)
	Hydraulic oil tank	200 L
Chassis	Track width	500 mm
	Track shoes number	43(each side)
	Carrier rollers number	2(each side)
	Track rollers number	7(each side)
Electric	System vottage	24 V
	Battery capacity	24 V,100 Ah×2

PRODUCT FEATURES

Cummins HPCR Electronically Controlled Engine. Stable & Reliable, Fuel-efficient
Three-stage Air & Fuel Filtering System
Charge Air Cooling System with Parallel Radiator
Dual-pump Double-circuit Constant Power Control Hydraulic System
8 inch LCD Display with Multi Purpose
Comfortable ROPS Cabin with 2.7m³ Operational Space
No Frame Cab Glasses to Enlarge Operation Field of View
Heavy-duty Working Device with High Strength Low Alloyed Steels

OPTIONAL

0.25m³ narrow bucket
0.56m³ loading bucket
0.75m³ loading bucket
Breaking hammer & pipeline
Work warning light
Walking alarm
Battery capacity
Top protecting net
Front protecting net
600mm triple grouser shoes
700mm triple grouser shoes
Track rubber block



The following blank can be used for notes or comments

For more information on Lonking products,Please contact our local agent;

Tel: +48 575 234 090
Email: sprzedaz@lonking-eu.com

- OPERATING WEIGHT: 14000kg
- ENGINE POWER: 90kW
- BUCKET CAPACITY: 0.65m³
- TRAVEL SPEED: 3.6/5.7km/h